

Smart Home Collection Hub

Set-Up Instructions for Android

The Smart Home Collection Hub connects to home networks to unlock the luxury of shade control. Experience customization with scene and timer options as well as voice control via Google Assistant Amazon Alexa.

THE APP ALLOWS FOR:

1. Individual and group control – Group of shades by room and conveniently control them accordingly.
2. Remote connectivity - Control shades remotely, whether home or away on a local network or an internet connection.
3. Scene control - Personalize shade control and organize how your shades operate by specific daily events.
4. Timer functionality - Set and forget. Lower, raise and activate shade scenes automatically at the optimal time.
5. Sunrise and Sunset - Utilizing time zone and location, the Pulse 2 can automatically raise or lower shades according to the position of the sun.
6. Compatible IoT Integrations:
 - IFTTT via applets
 - Amazon Alexa devices
 - Google Home
 - Smart Things

GETTING STARTED:

- In order to experience your shade control through the SHC app, you will need to have:
- Downloaded the free app via the Google Play Store.
- Purchased one or more Hub's depending on the size of the area you would like to cover.
- Familiarized yourself with the app navigation guide below.
- Created a Location then pair hub to that location. Our step by step guide will explain in more detail.

WI-FI HUB TECHNICAL SPECIFICATIONS:

- Radio Frequency range: 98 feet or 30 meters - (no obstructions).
- Radio Frequency: 433MHz
- Wi-Fi 2.4 GHz or Ethernet Connectivity (CAT 5).
- Power: 5V DC.
- For Indoor Use Only.

SETUP BEST PRACTICES:

- The Hub must be within signal range of both the shades and the connected via Lan or Wi-Fi router.
- If you chose to use the Wi-Fi network, certify that it must be visible.
- Environments with multiple WAPs (wireless access points) may need all but the main router temporarily disabled.
- Security settings may need to be temporarily disabled.

CAPABILITIES:

- Motors per Hub: 20
- Locations per account: 5
- Hub's per location: 5
- Rooms per Location: 30
- Scenes per Location: 15
- Timers per Location: 15

WHAT'S IN THE BOX?



The Smart Home
Collection Hub



USB Power
Supply



32" (80cm) USB
Power Cord



Ethernet cable




Quick Start Guide

UNPACKING THE HUB 2.0



1. Unpack the Hub.



2. Check the Box Contents.



3. Plug the USB Power
Cord into the Power
Supply




4. Connect the Micro
USB end into the back
of the Hub.



5. Plug the Power
Supply into the outlet
and place the Hub in a
centrally located in
your home.

APP NAVIGATION:


Home Page

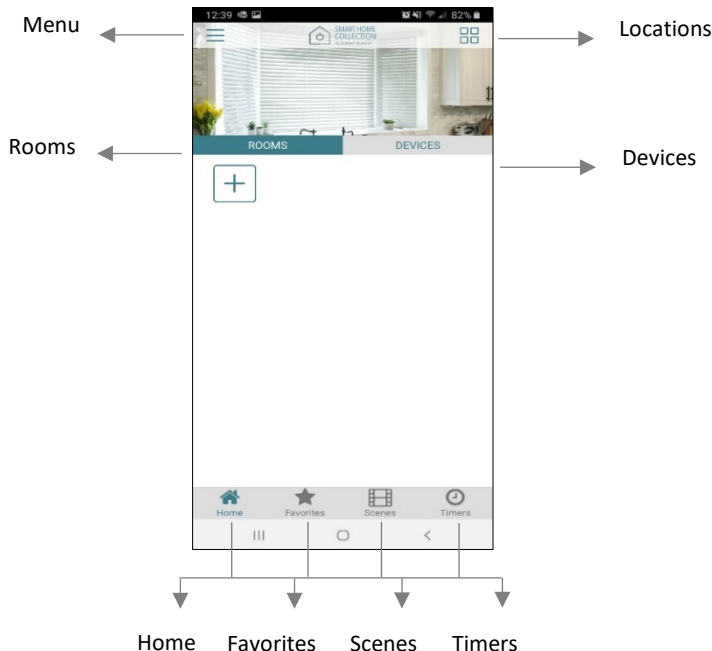

Home: Shows the main control screen with rooms and devices tabs
Favorites: Allows you to create a list of your favorite Devices or Scenes
Scenes: Show a list of scenes created
Timers: Show a list of scene timers


SETTING UP:

STEP 1 – Open App

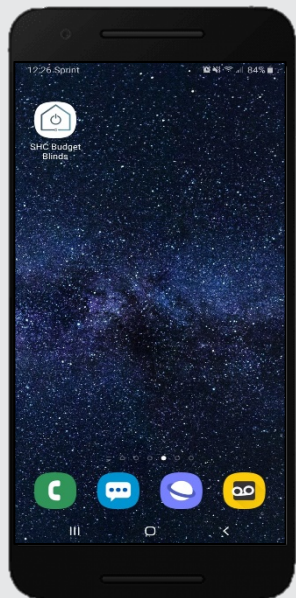


Open the SHC mobile App.

STEP 2 – Sign Up

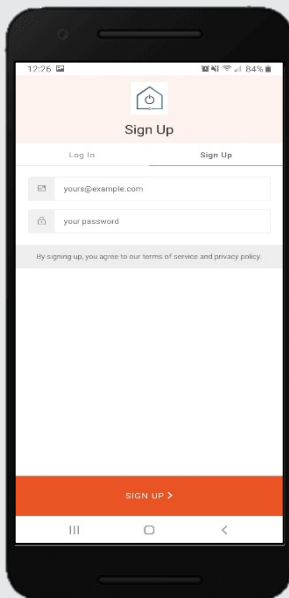


If required, create a new account. Select Sign Up on the Top Right corner of the screen.

STEP 3 – Sign Up

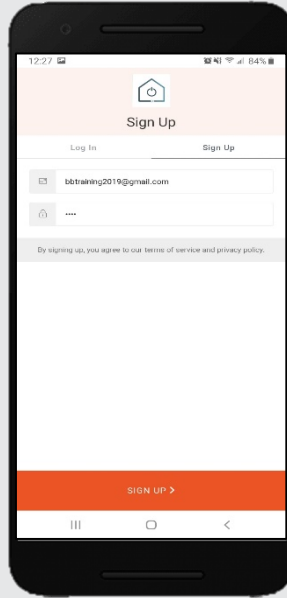

Creating an account will require an email address and password.


STEP 4 – Sign In

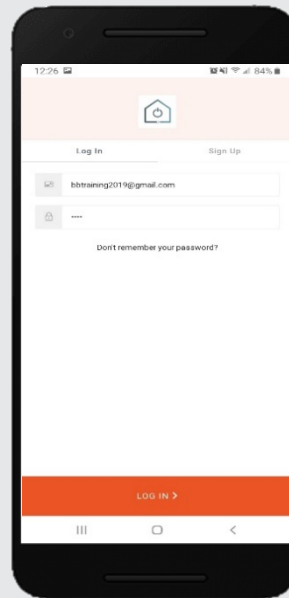

If you already have an account Log in with your account information.


CREATING A LOCATION:

STEP 5 – Add Location

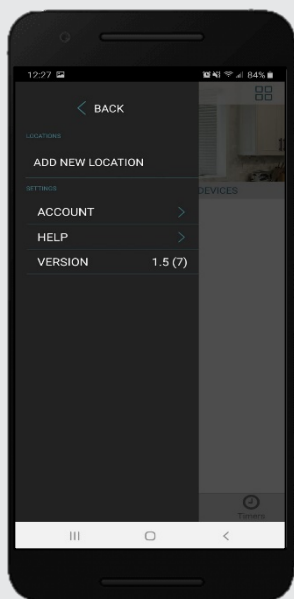


Open the App from the home screen and select the menu button, click "ADD NEW LOCATION".

STEP 6 – Add Location

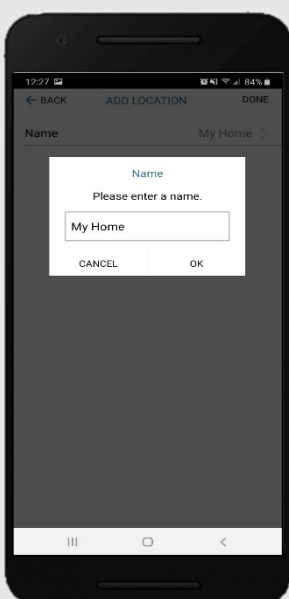

Select the default location and update the location name if desired. Select Ok then Done.


STEP 7 – Toggle Location

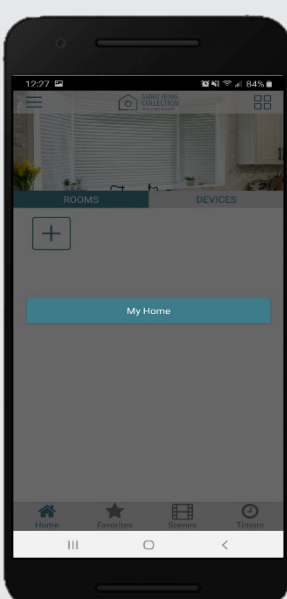

If you have setup multiple locations, select the 'Location' icon in the upper right corner to toggle between locations.


CONFIGURING A HUB:

STEP 8 - Configure a Hub

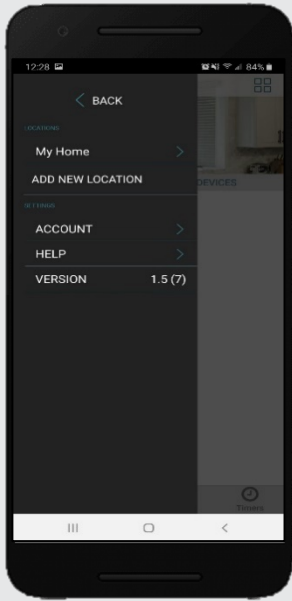


Select the location desired to add a new hub to.

STEP 9 - Configure a Hub

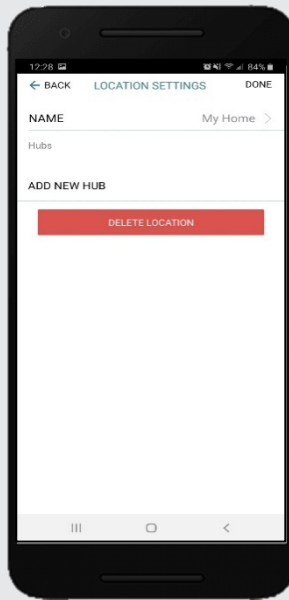


Click on "ADD NEW HUB" to start the process to setting up your HUB on the App.

STEP 10 - Configure a Hub

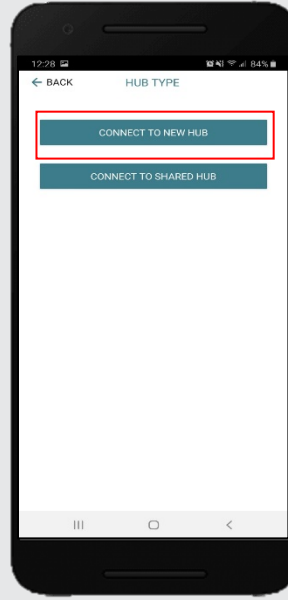


Follow on the screen instructions and click on the button to connect to NEW HUB.

STEP 11 - Configure a Hub

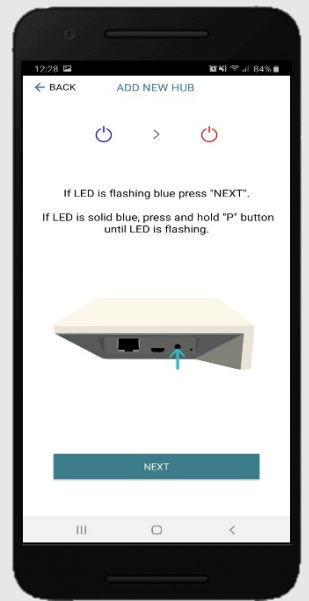


Pressing the P button for ~2 secs until the Blue LED begins flashing. This indicates the hub is in pairing mode. Press 'Next'

STEP 12 - Configure a Hub

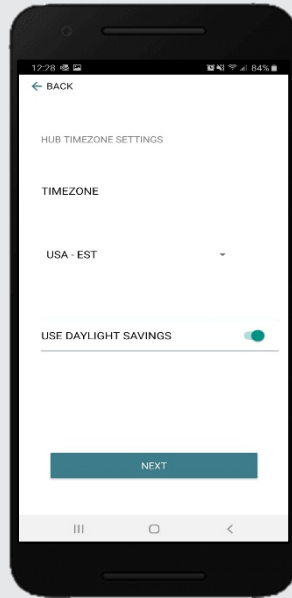


Select your Time Zone. This is important for timers to operate correctly.

STEP 13 - Configure a Hub

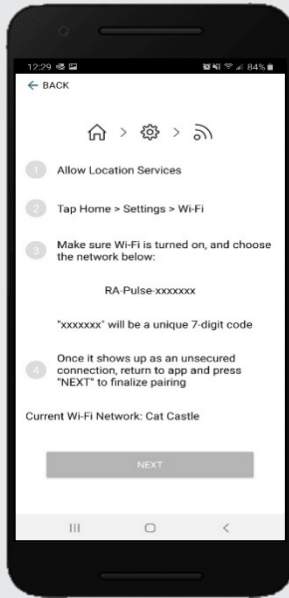


Make sure that your current Wi-Fi Network aligns with the network you want the hub connected to.

STEP 14 - Configure a Hub

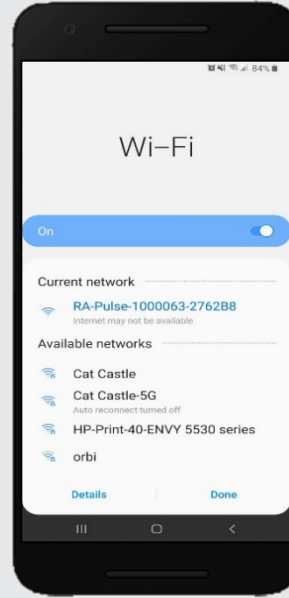


Open your Wi-Fi settings and connect to the appropriate RA-PULSE-xxx network that corresponds with your hub.

STEP 15 - Configure a Hub

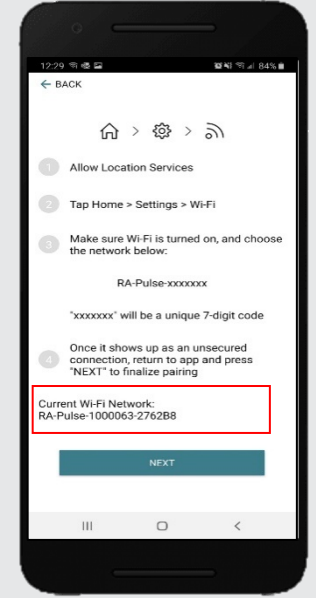


In the app, verify you are connected to your RA_PULSE-xxxx network, press 'NEXT' to pair the hub.

STEP 16 - Configure a Hub

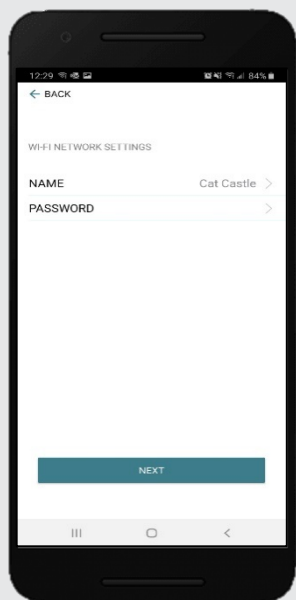


Verify your Wi-Fi network is listed. Type in the correct network name if it is not.

STEP 17 - Configure a Hub

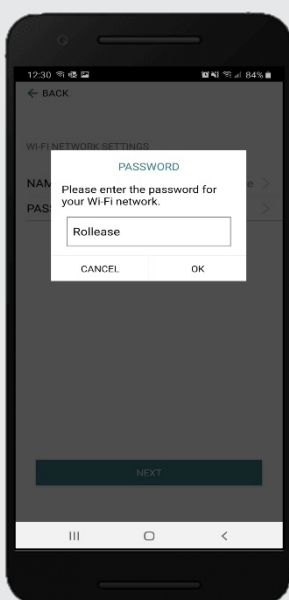

Enter your Wi-Fi networks password.

STEP 18 - Configure a Hub

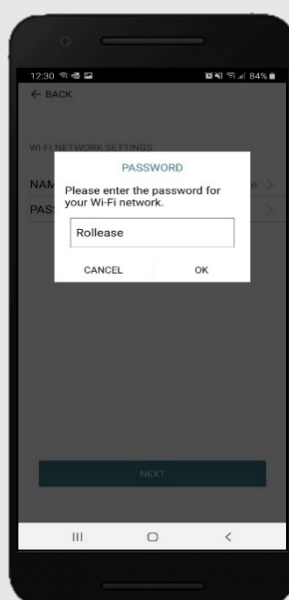


Press the 'NEXT' button to forward with the Hub configuration.

STEP 19 - Configure a Hub




Wait while the hub connects to your Wi-Fi Network.

STEP 20 - Configure a Hub

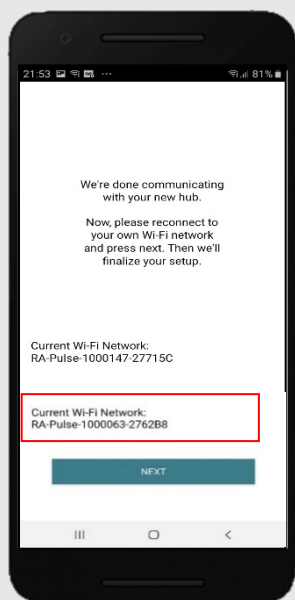


Before selecting 'NEXT' verify the network changes over to your home Wi-Fi network.

STEP 21 - Configure a Hub

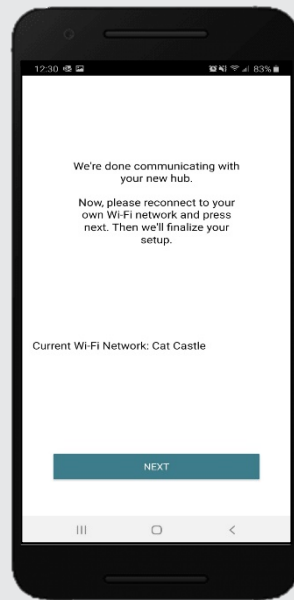


Select 'NEXT' to continue the setup process.

STEP 22 - Configure a Hub

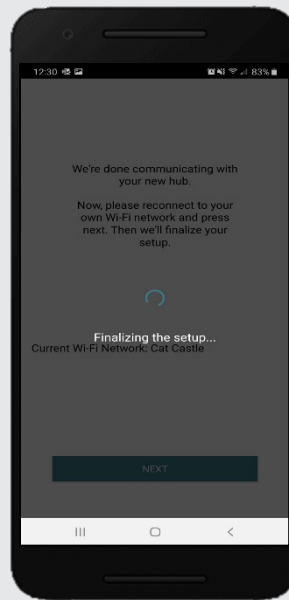

Wait as the hub finalizes the setup.

STEP 23 - Configure a Hub

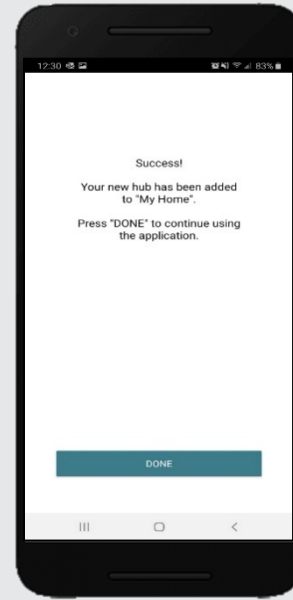


The Hub is ready to be used! Press 'DONE' to start the Application.

HOW TO PAIR A MOTOR TO THE APP:


We recommend setting up your motors with a remote prior to syncing with the App.

STEP 24 – Pair a motor

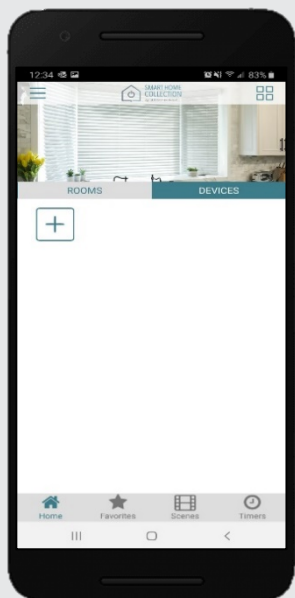


On the home screen select 'DEVICES' then select the 'Plus' icon to add a new shade.

STEP 25 – Pair a motor

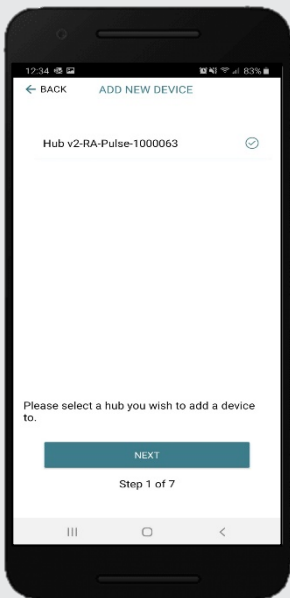

From the list select the HUB you wish to pair the motor too.

STEP 26 – Pair a motor

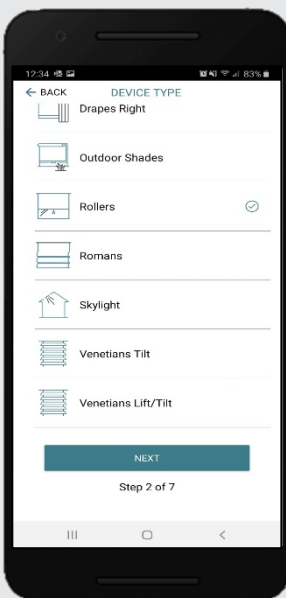


Select which device type best represents your shade.

STEP 27 – Pair a motor




Make sure the shade device is plugged in or ready to be paired and select 'NEXT'

STEP 32 – Pair a motor

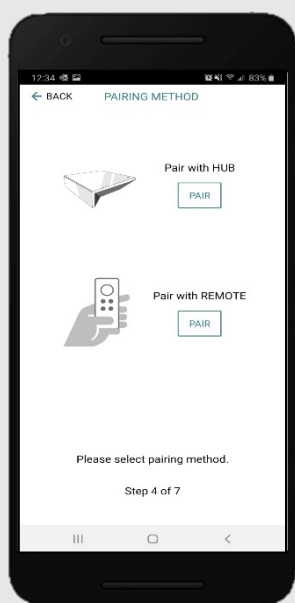


Choose your pairing method: 'PAIR USING HUB' or 'COPY FROM REMOTE'.
*We recommend copying from a remote for the best results.

STEP 33 – Pair with Remote

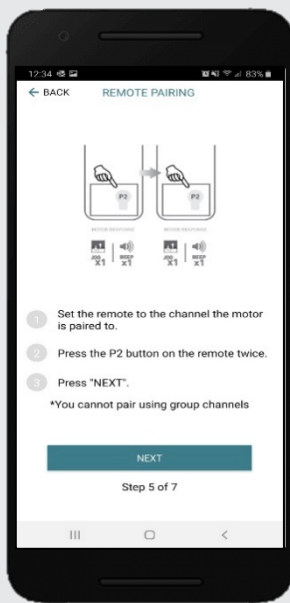


Ensure the remote is on a channel that has individual control of the shade to be added. Remove the remote battery cover and press the P2 button Twice, then 'NEXT'.

STEP 34 – Pair with HUB

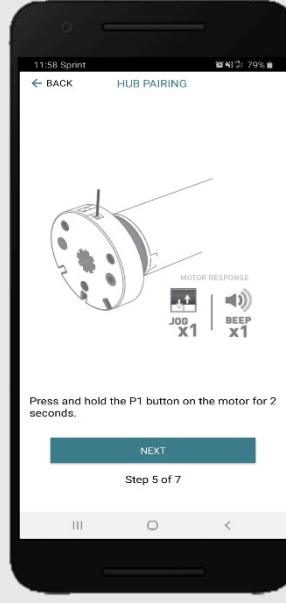


Press and hold the P1 button on the motor head ~2 seconds. The motor will jog up and down once and you will hear one audible beep. Press 'PAIR' on the app screen.

STEP 35 – Pair a motor

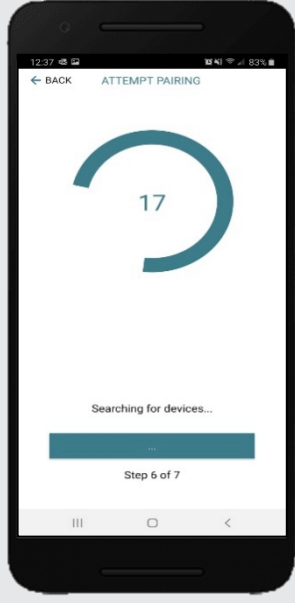

Wait as the app searches for the new device.

STEP 35 – Pair a motor

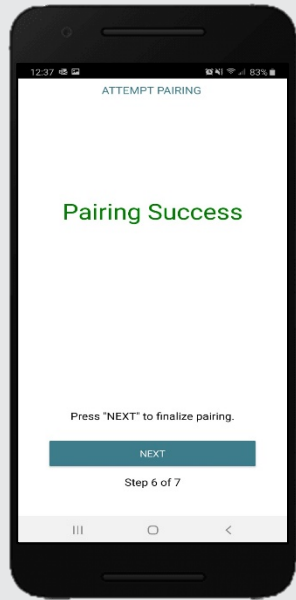


If the pairing process was successful, Press 'NEXT' to finalize pairing.
If pairing fails, try the process again.

STEP 36 – Shade Details




Input the desired device name. Press 'DONE' to complete the setup.

STEP 37 – Pair a motor

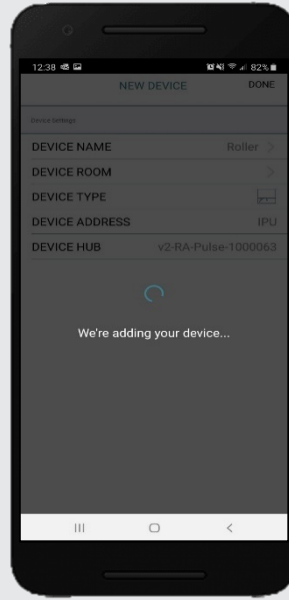

The "New Device" will now be added to the 'DEVICE' tab


STEP 38 – Shade Ready

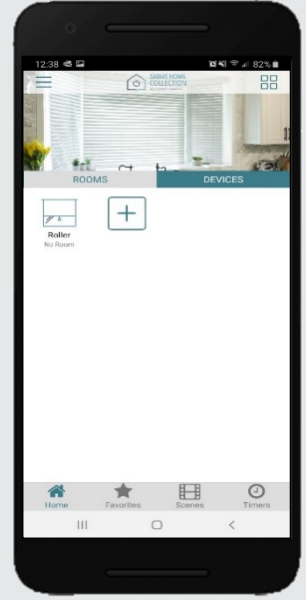

Shade is now ready for operation from SHC App.


HOW TO OPERATE SHADES:

STEP 1 – Operate Shade

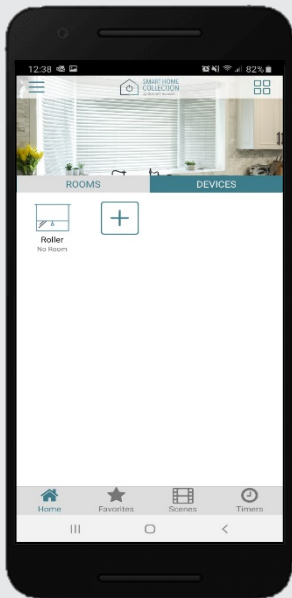


Select the device that you wish to operate.

STEP 2 - Open a shade

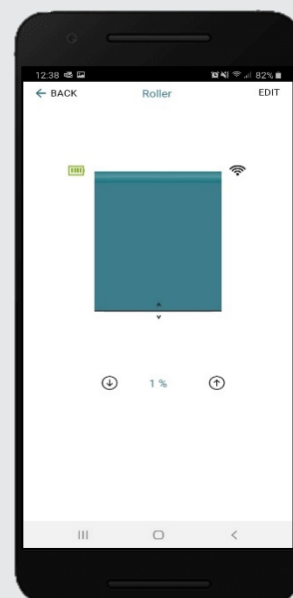


Close the shade by pressing the "Down Arrow" icon or scrolling the black line to the bottom.

STEP 3 - Close a shade

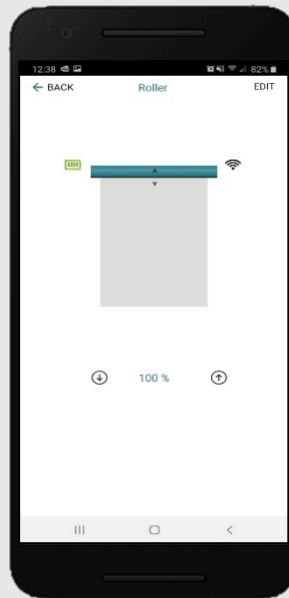

Open the shade by pressing the "Up arrow" icon or scrolling the black line to the top.


STEP 4 - Move a shade

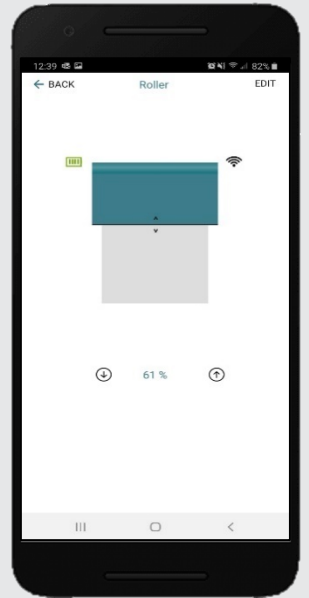

Move the shade to the position desired by scrolling the black line to any position.


HOW TO CREATE A ROOM:

STEP 1 – Create a Room

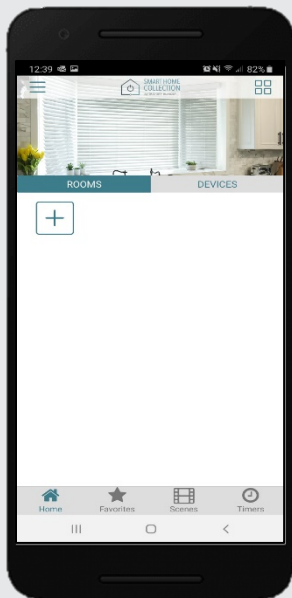


Once the Shades are paired to the App. Click 'ROOMS' tab. Select the "Plus" icon to add a new room.

STEP 2 – Create a Room

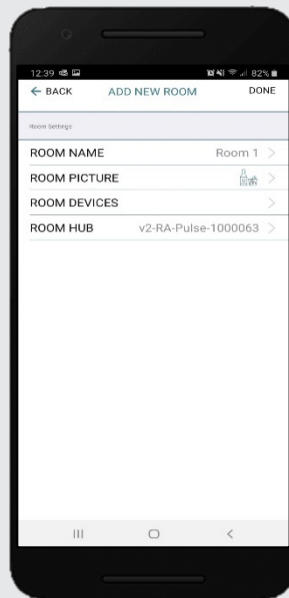


Select the 'ROOM NAME' to enter the desired room name.

STEP 3 – Create a Room

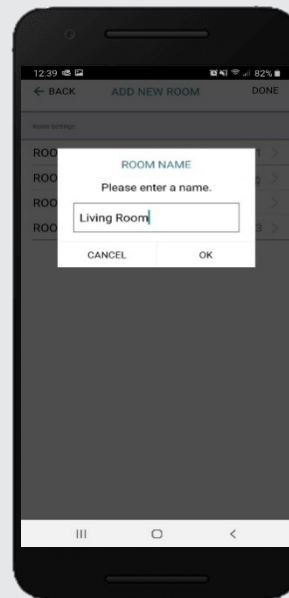


Enter the Room Name and click "OK".

STEP 4 – Create a Room

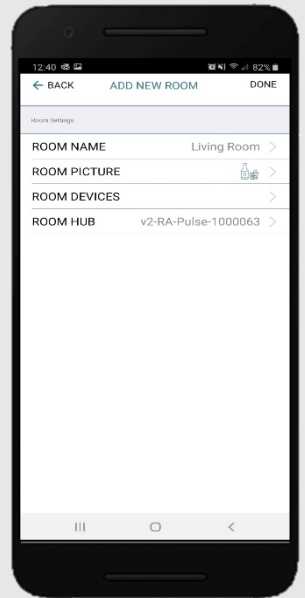


Select 'ROOM PICTURE' to select an icon to represent the room.

STEP 5 – Create a Room

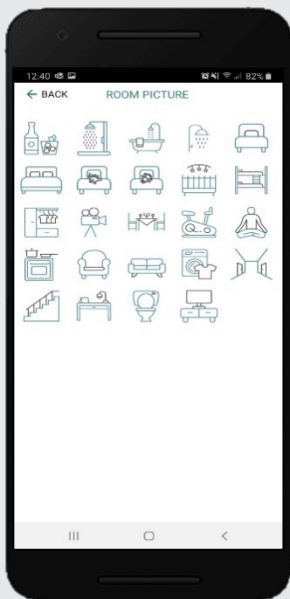


Select the appropriate icon for the Room.

STEP 6 -Add Shades to a Room

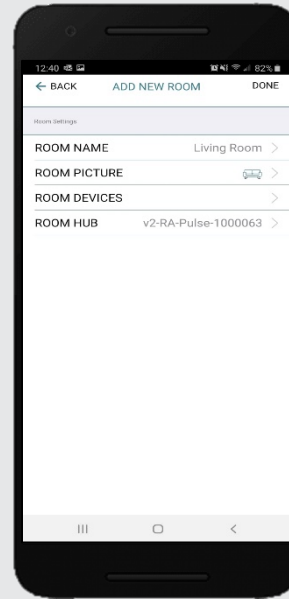


Select 'ROOM DEVICES' to add a new device to the room.

STEP 7 -Add Shades to a Room

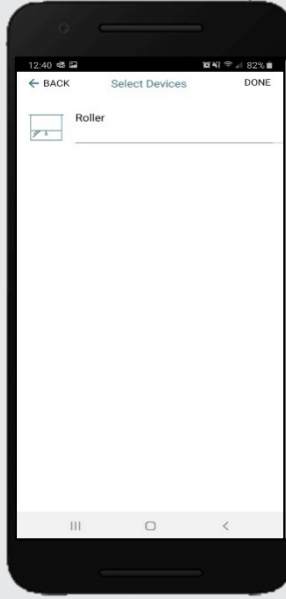


Select the devices you wish to be added to the room.

STEP 8 -Add Shades to a Room

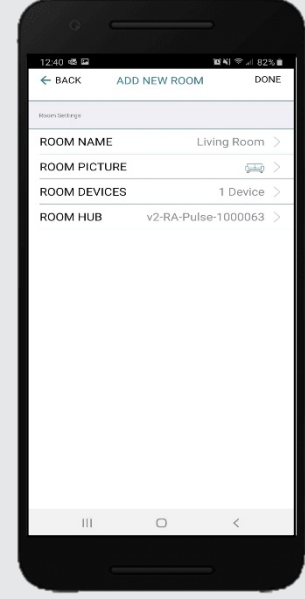


Press 'DONE' to complete the setup of the room.

STEP 9 -Add Shades to a Room

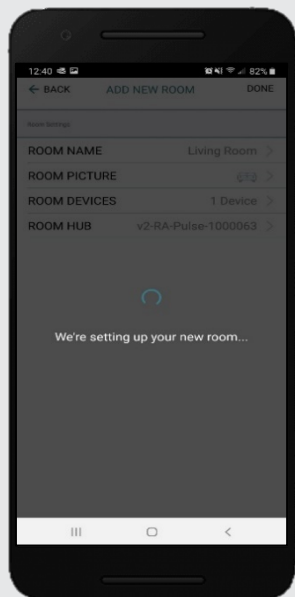


Wait for the App to conclude the process of room set up.

STEP 10 – Operate a Room

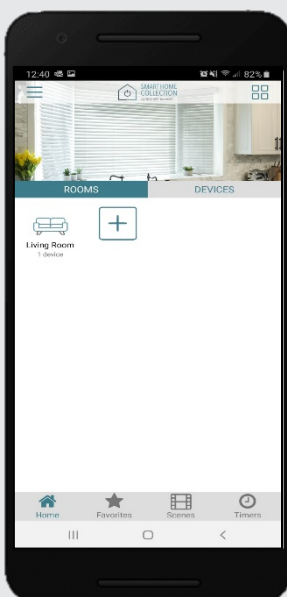

Select the Room to operate All shades that have been added to the room at the same time.

STEP 11 – Operate a Room

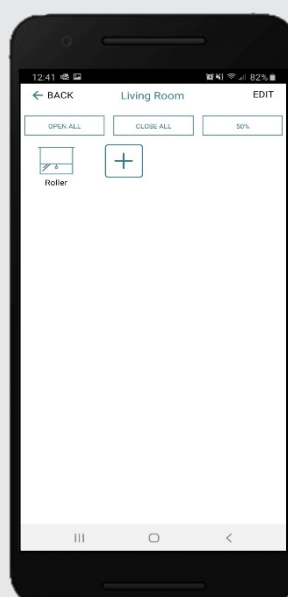


Operate all shades in the Room with the three button options available: Open, Close and move 50%

HOW TO CREATE A SCENE:


You can create scenes to set a treatment or group of treatments to specific heights.

STEP 1 – Create a Scene

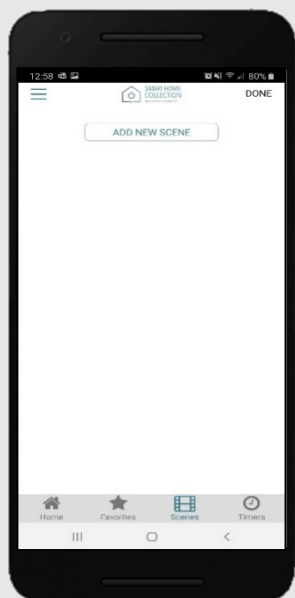


Select Scenes then, 'Add New Scene' to begin programming your desired scene.

STEP 2 – Create a Scene

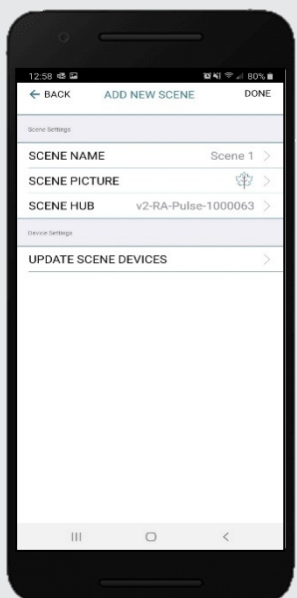


Select the 'SCENE NAME' to customize the name of your scene.

STEP 3 – Create a Scene

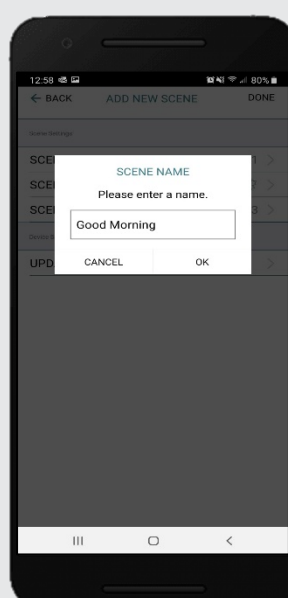


Input your scene name.

STEP 4 – Create a Scene

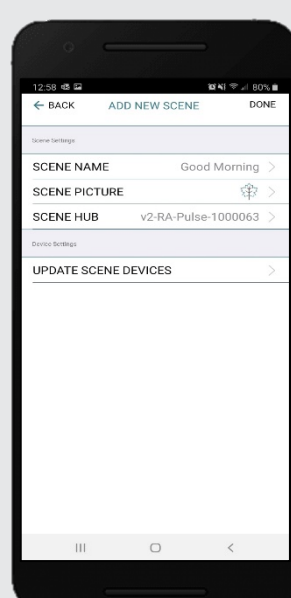


Select 'SCENE PICTURE' to customize the icon for your scene.

STEP 5 – Create a Scene

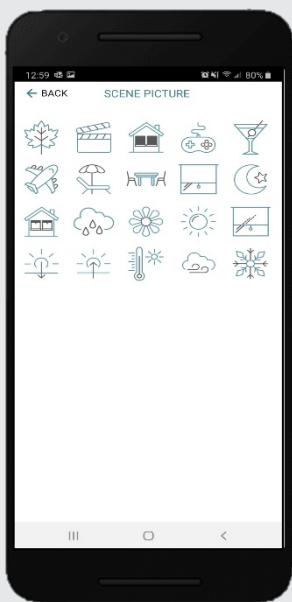


Select the icon that represents your scene.

STEP 6 – Create a Scene

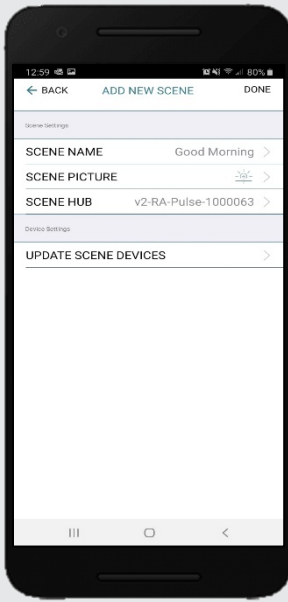


Select 'UPDATE SCENE DEVICES' to add devices into the Scene.

STEP 7 – Create a Scene

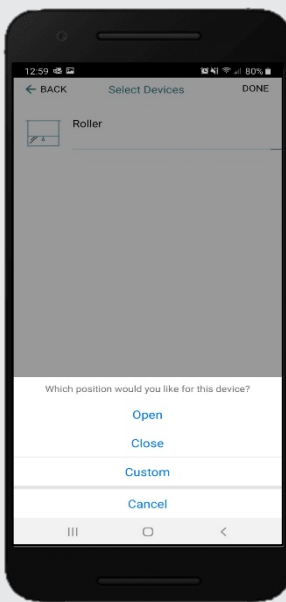


Choose custom heights (by %) or set open/close for all selected treatments.

STEP 8 – Create a Scene

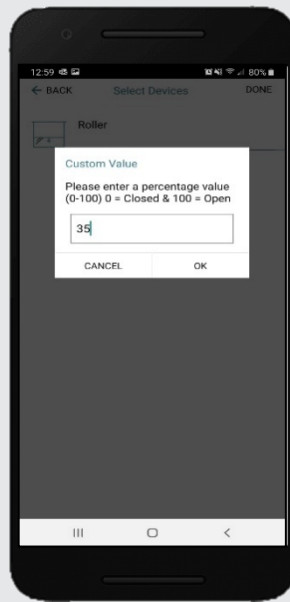

Set the shade height percentage if necessary. Select 'DONE' to create your scene.

STEP 9 – Create a Scene

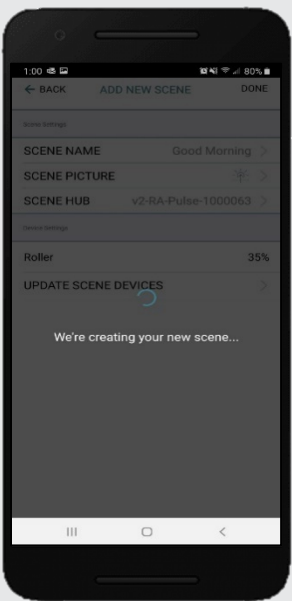

Wait as the app creates your new scene.

STEP 10 – Activate a Scene




To activate your custom scene just press 'GO' next to the desired scene name

PROGRAMMING TIMERS:


You can program timers to trigger the specific operation of your shades and scenes at your desired times throughout the day.

STEP 1 – Create a Timer

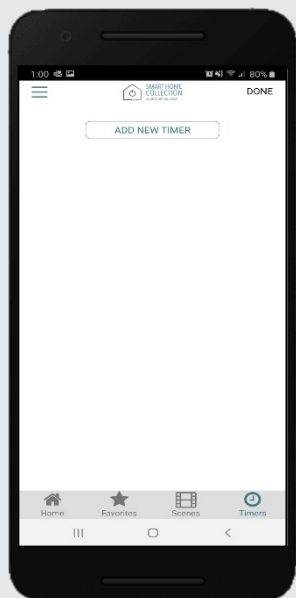


Select 'TIMERS' then, 'ADD NEW TIMER' to program your timer.

STEP 2 – Create a Timer

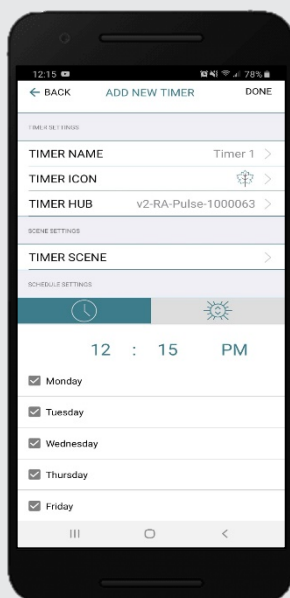


Select 'TIMER NAME'.

STEP 3 – Create a Timer

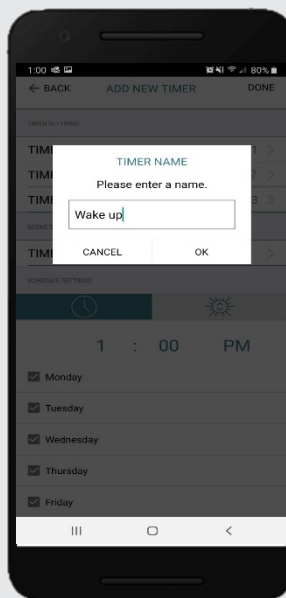


Input your desired timer name.

STEP 4 – Create a Timer

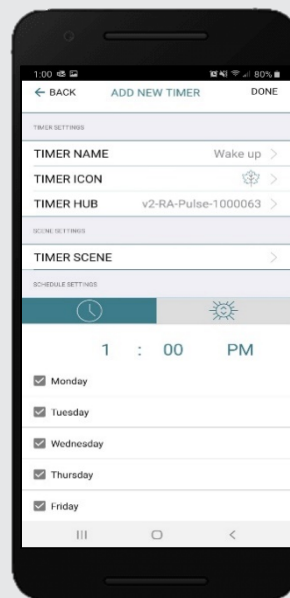


Select 'TIMER ICON' to add an icon for your timer.

STEP 5 – Create a Timer

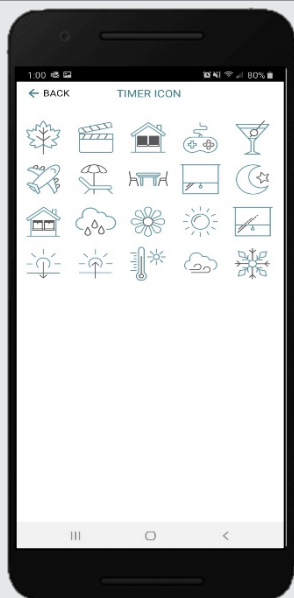


Select the appropriate icon for the Timer.

STEP 6 – Create a Timer

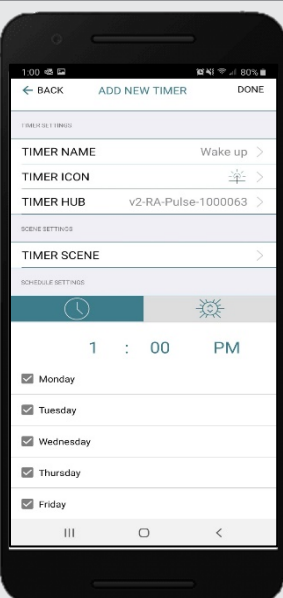


Select the 'TIMER SCENE' to choose the scene you wish the timer to activate.

STEP 7 – Create a Timer

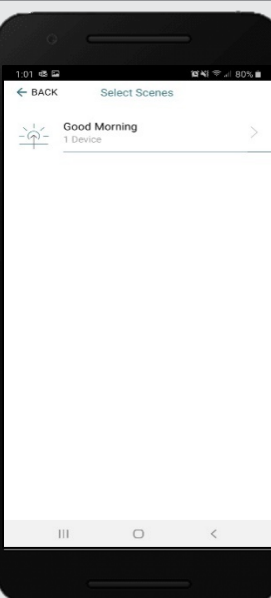

In the Scene list, add the scenes you wish to operate.


STEP 8 – Create a Timer

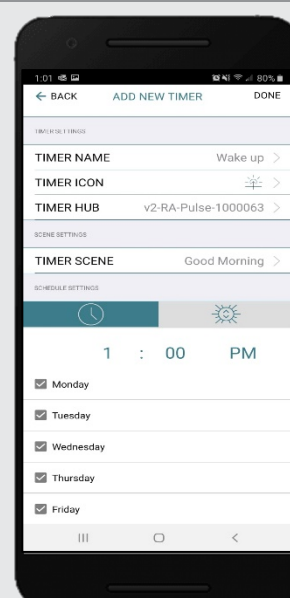

Set the time you wish the timer to trigger shade control.


HOW TO CREATE FAVORITE:

STEP 1 – Create a Favorite Device

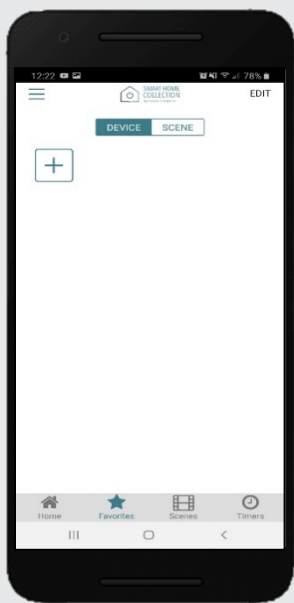


Select the "Plus" icon to add a favorite device to your 'Favorites'

STEP 2 – Edit a Favorite Device

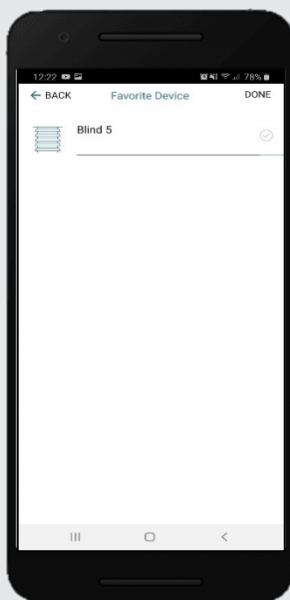

Select 'EDIT' in the upper right corner to remove the favorite device from your screen.

STEP 3 – Create a Favorite Scene

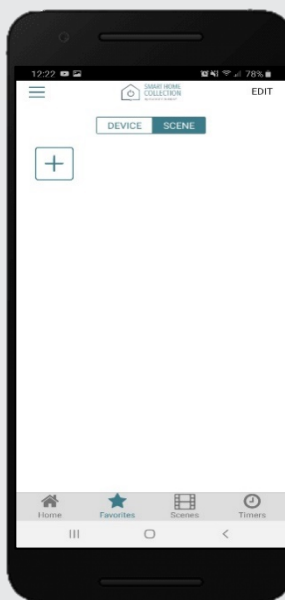

Select the "Plus" icon to add a favorite scene to your 'Favorites'


STEP 4 – Create a Favorite Scene



Select 'EDIT' in the upper right corner to remove the favorite scenes from your screen.


HOW TO ADJUST LIMITS:

STEP 1 – Adjust Limits

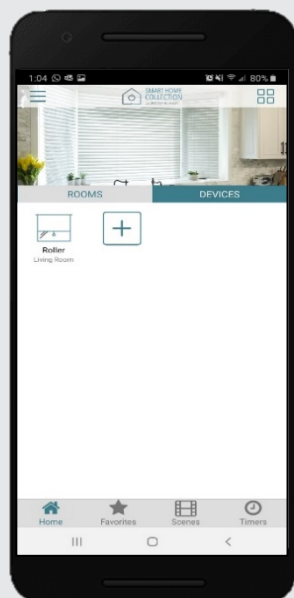


Select the device you want to adjust the limits on.

STEP 2 – Adjust Limits

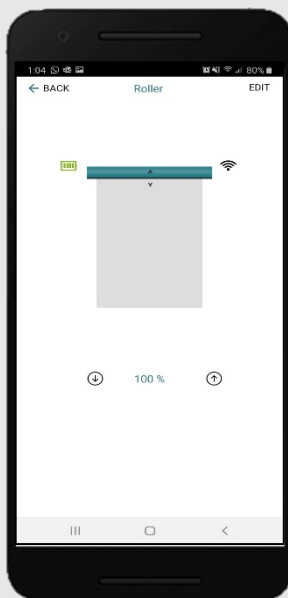


Select 'EDIT' in the top right to open the shades settings page.

STEP 3 – Setting Limits

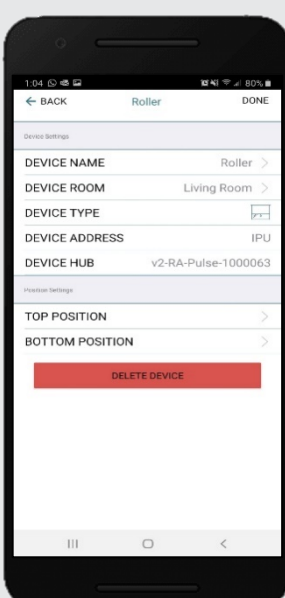


Modify the Top or Bottom position of the Device as desired

STEP 4 – Setting Limits

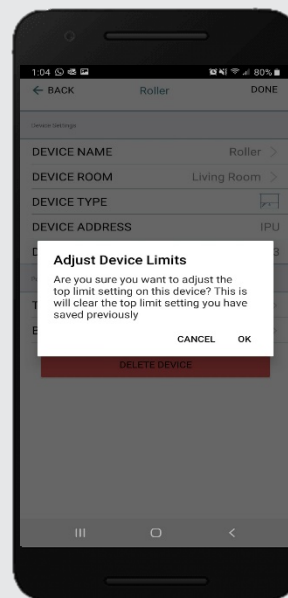


Select the 'Top Position' to change the upper limit of your shade. Press 'OK' to continue

STEP 5 – Setting Limits

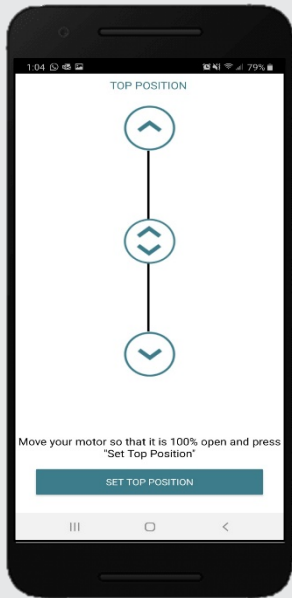


To move your shade a little bit, press the arrow buttons or slide the double arrow button. Press 'SET TOP POSITION' to save.

STEP 6 – Setting Limits

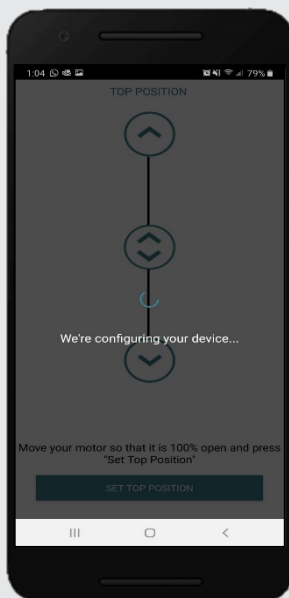


The app will configure the new top position

STEP 7 – Setting Limits

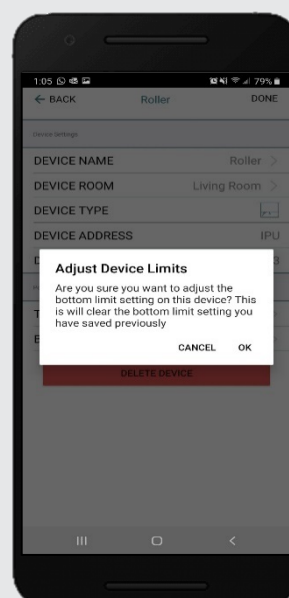


Press the 'Bottom Position' to change the lower limit of your shade. Press 'OK' to continue

STEP 8 – Setting Limits

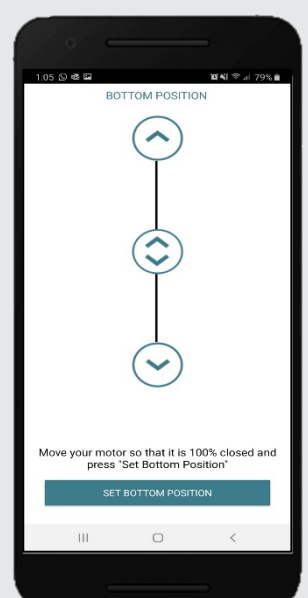

To move your shade a little bit, press the arrow buttons or slide the double arrow button. Press 'SET BOTTOM POSITION' to save.


STEP 9 – Setting Limits

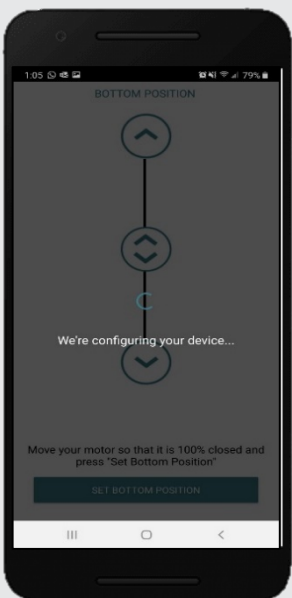

The app will configure the new Bottom Position.


HOW TO SHARE THE HUB:

STEP 1 - Share a Hub

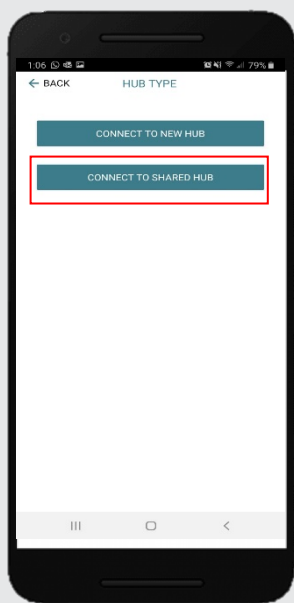


In the 'Add a Hub' Screen, it is possible to connect to a shared hub.

STEP 2 - Share a Hub

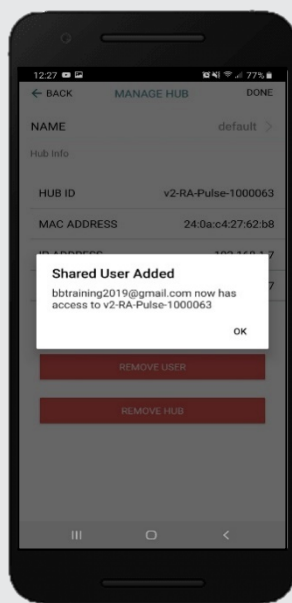


The HUB must have been shared from another account.

STEP 3 - Share a Hub

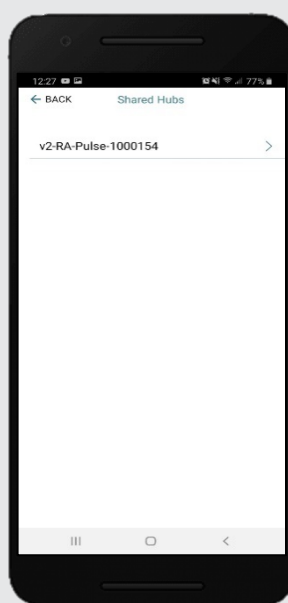










The shared Hub will be listed on the shared Hubs list to be added.

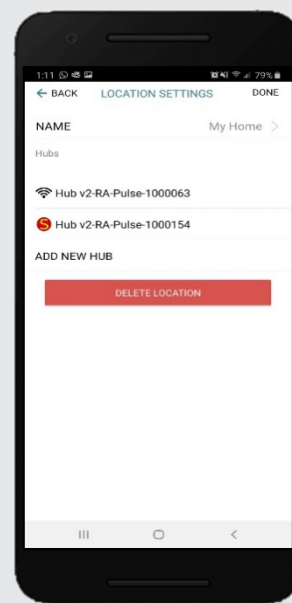STEP 4 - Share a Hub








After it is added, the shared hub will appear under the Location Settings it was added to with a red 'S'

LED STATUS INDICATION:

| COLOR | RESPONSE | STATUS |
|---|----------------------------------|--|
|  | Blue LED blinks | Automate Pulse 2 Hub is in pairing mode. |
|  | Blue LED short blinks | Automate Pulse 2 is configuring via the App. |
|  | Blue LED long blinks | Automate Pulse 2 is Connected to Wi-Fi. |
|  | Blue LED short blinks five times | Automate Pulse 2 is getting a Firmware Updating. |
|  | Blue LED is solid | ON App is connected to Automate Pulse 2 Hub. |
|  | Red LED short blink | Automate Pulse 2 is Disconnected from the Wi-fi. |
|  | Red LED long blinks | Automate Pulse 2 Hub Reset Button Pressed (Paperclip Needed) |
|  | Red LED is solid | Factory Reset Initiated (User can release reset button) |
|  | LED is Off | Automate Pulse 2 Hub is OFFLINE |

MEANING OF ICONS:

| COLOR | RESPONSE | STATUS |
|---|---------------------|--|
|  | Signal Icon | The Shade is connected with the HUB and works properly. |
|  | Battery Icon Green | The Battery Level is over than 70%. |
|  | Battery Icon Yellow | The Battery Level is between 50% and 70%. |
|  | Battery Icon Red | The Battery Level is less than 50%. |
|  | Offline mode | The motor is offline, and the mobile is not in the same network. |

TROUBLESHOOTING:

The following scenarios are common issues that may cause connectivity problems during the Smart Home Collection Hub pairing process. If you cannot achieve success connecting the Smart Home Collection Hub to your network, please reference the below most common pairing roadblocks.

I CANNOT CONNECT TO MY HIDDEN WI-FI NETWORK.

The Smart Home Collection Hub does not currently support pairing with hidden networks. To connect to a hidden network, you will need to unhide the network. Once the network pairing process is complete you can re-hide the network and the Wi-Fi HUB will work without issue.

I HAVE MULTIPLE ACCESS POINTS AND CANNOT COMPLETE THE PAIRING PROCESS.

If you have multiple wireless access points, we recommend that you turn off all but one to complete the network pairing process. Once this is complete you can turn on all the wireless access points and the Wi-Fi HUB will work without issue.

I CANNOT CONNECT TO MY 5GHZ WI-FI NETWORK.

The Smart Home Collection Hub does not currently support operation over a 5GHz network. It operates on a 2.4GHz network or using a LAN CONNECTION (CAT 5). Most routers are dual band and can support both network configurations. Please make sure that the 2.4GHz band is turned on in your wireless router's settings.

NETWORK SECURITY SETTINGS ARE INTERFERING WITH THE SETUP PROCESS.

Some companies or large corporate offices have network security settings more advanced than the typical homeowner. If you are setting up in this environment, please consult your network administrator. It may be necessary to enable device-to-device communication. One solution is to use a device with a mobile data connection available in the background to complete the set-up process.

MY SMART HOME COLLECTION HUB IS NOT CONSISTENTLY WORKING.

There are many things that can interfere with the radio communication that the Smart Home Collection Hub uses. Try positioning the Smart Home Collection in a different location and/or closer to the shade to improve performance. Due to varying levels of interference it may be necessary to purchase additional Wi-Fi HUB to extend the coverage throughout your location.

SUPPORT RESOURCES:

For further assistance, contact your retailer, visit our website at www.budgetblinds.com.